

## Shanghai Truer Technology Co., Ltd.

Shanghai Truer Technology Co., Ltd. (Truer Technology) is one of the subsidiaries of Truer group, which is mainly responsible for the export business. At present, the main products cover the raw materials, production equipment, inspection devices and service for additive manufacturing (AM), Metal Injection Molding (MIM), Powder Metallurgy (PM), automation and other manufacturing fields.

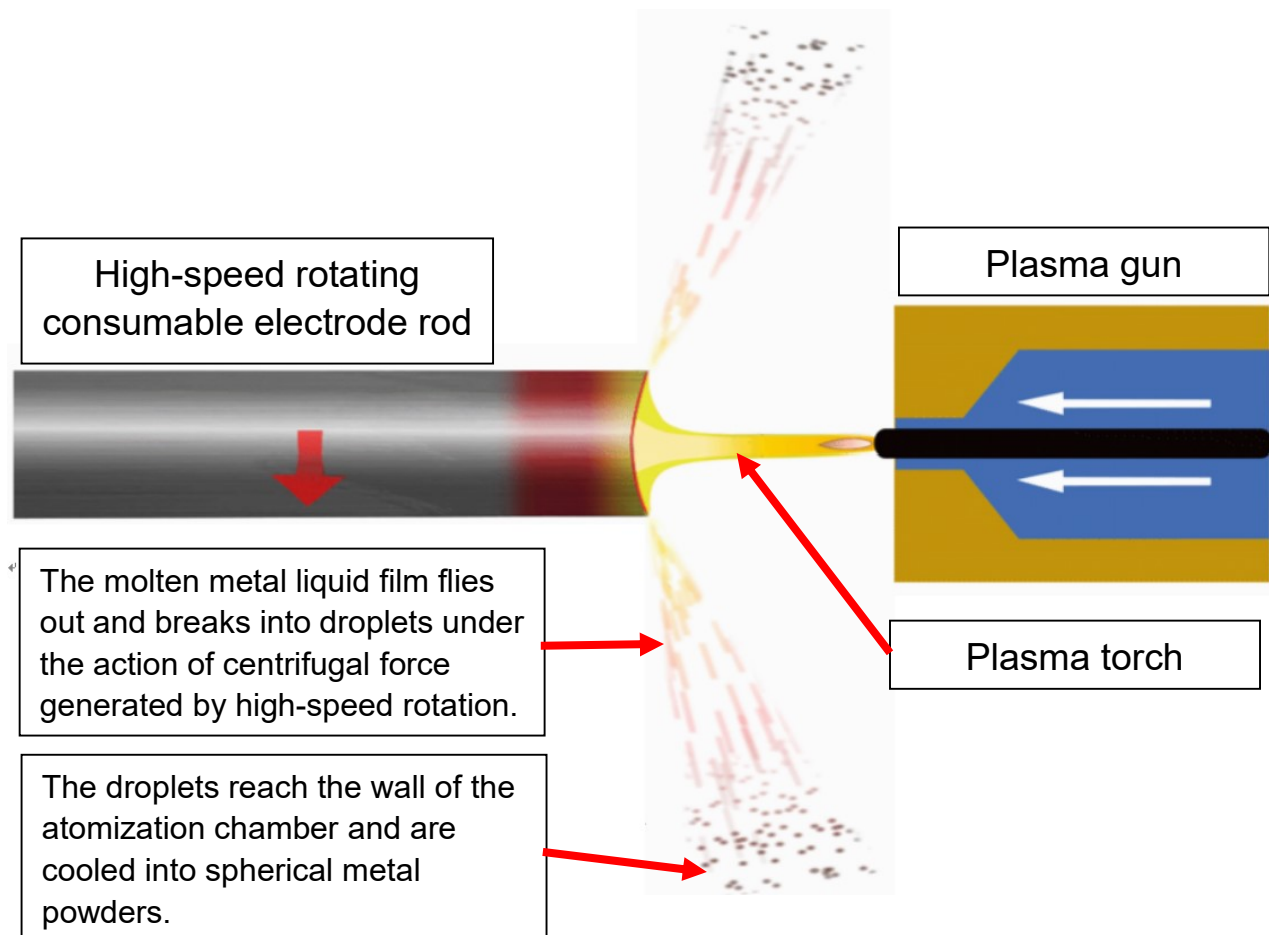
At present, we have 12 factories and more than 30 strategic partners in China for different applications.

We take the lead in providing innovative desktop level plasma rotating electrode atomizing powder making equipment (SLPA-D) globally. The maximum rotation speed of consumable electrode rods can reach 50,000 rpm, which is very suitable for the preparation of small batch, multi variety and high-quality metal powders. Using this equipment, we and our customers have successfully developed more than 60 different compositions of high-quality spherical metal powders such as TiNi, Tita, TiAl, TiNbZr and CoCrMo. In addition, we also provide the medium-sized PREP metal powder making equipment (SLPA-N50) and large-scale metal powder making equipment (SLPA-N75), which are suitable for industrial production and provide high-quality metal powders with reasonable cost for 3D printing and other applications.

We are committed to providing the suitable plasma rotating electrode atomizing metal powder making equipment or high-quality PREP metal powders to meet different customers' requirements, i.e. new material development, or production of high-quality parts, etc. We will continue to invest in R&D to optimize our plasma rotating electrode metal powder making equipment and production process, in order to provide customers with the best quality PREPped metal powders.

## Principle of Plasma Rotating Electrode Process (PREP)

The high-temperature plasma torch melts one end face of the high-speed rotating electrode rod (raw materials), then the molten metal liquid film flies out and breaks into droplets under the action of centrifugal force generated by high-speed rotation. Some droplets will collide with inert gas molecules and break into smaller droplets. All these droplets are gradually solidified under the action of surface tension during flight and become spherical, and finally they reach the wall of the atomizing chamber and are cooled into spherical metal powders.



## Large-scale PREP system: SLPA-N75



The large-scale PREP equipment (SLPA-N75) is purposely designed for continuous, industrial mass production of high quality spherical Titanium alloy powders with the following characteristics:

- ✓ Reasonable cost for large-batch production
- ✓ Ergonomics friendly, easy to operate
- ✓ Simple and professional man-machine interface design
- ✓ Relatively lower fine powders output rate (rotating speed up to 22,000rpm)
- ✓ The produced powders have high sphericity (over 90%) and high quality, such as low porosity powders, low satellite powders, high purity (low oxygen increase,  $\leq 120\text{ppm}$ ) due to atomizing in the inert protection atmosphere.
- ✓ Suitable for production of metal powders with melting point  $\leq 2,600\text{ }^\circ\text{C}$  , mainly for Titanium alloys.

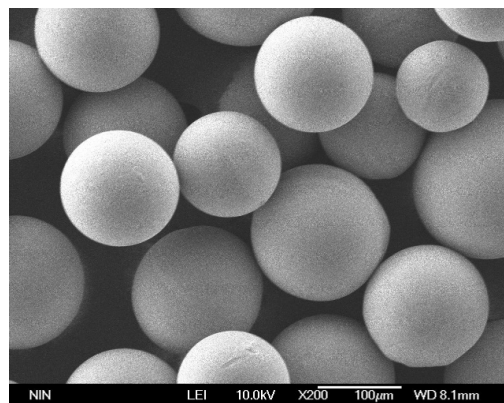
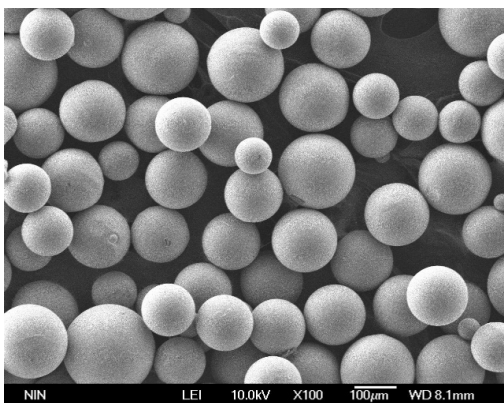
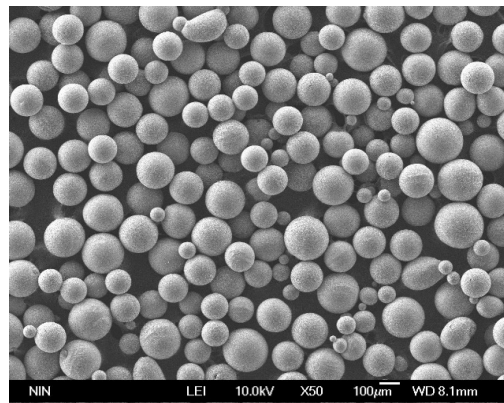
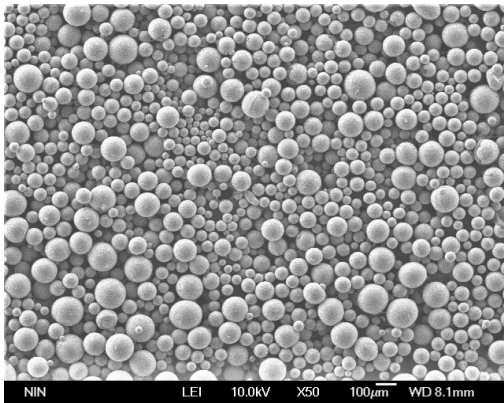
## Main Technical Parameters and Structure

<b>Main Technical Parameters</b>	
Rotating speed of electrode rod	Up to 22,000rpm (Adjustable)
Diameter of Eelectrode rod	Φ75mmx360mm
Powder Morphology	Spherical Rate ≥90%
Particle Size Distribution	TA15: -150μm≥75%
Capacity	≥100kg (8h, TA15)
Oxygen Increment	≤120ppm
Atmosphere	Ar or He (high purity) or other inert gas
Maximum power	300kW
Floor Space	8m x 8m x 6m
Applications	Ti&Alloys, Ni&Alloys, Co&Alloys, Stainless steels, high entropy alloys, etc.

<b>Main Sub-systems</b>		
1	Plasma gun system	In-house design and manufacturing
2	High rotating speed shaft system and dynamic sealing mechanism	In-house design and outsourced
3	Feeding system	In-house design and outsourced
4	Powder collection system	In-house design and outsourced
5	Atomization chamber	In-house design and outsourced
6	Vacuum system	Outsourced
7	Cooling system	In-house design and outsourced
8	Gas supply system	In-house design and outsourced
9	Power supply and Electrical control system	Outsourced

**Typical Particle Size Distribution of Metal Powders produced by SLPA-N75**

TA15	Mesh	+60	-60	-100			
	$\mu\text{m}$	>250	<250	<150			
	%	$\leq 5.0$	$\geq 95.0$	$\geq 75.0$			

**Typical Morphology of Metal Powders produced by PREP systems****Ti-alloy powders produced by PREP system**

**Example characteristics of metal powders produced by PREP system**

No.	Material code	Oxygen in raw material rods	Oxygen in metal powders	Oxygen increase
1	Ti48Al2Cr2Nb	470	560	90
2	Ti45Al8Nb	580	650	70
3	Nb521	150	250	100
4	Mo	35	100	65
5	Ta	40	10~30	-10↓

No.	Material code	Flow rate (s/50g)	Apparent density (g/cm <sup>3</sup> )	Tap density (g/cm <sup>3</sup> )
1	Ti48Al2Cr2Nb	28.3	2.39	2.59
2	Ti45Al8Nb	28.6	2.55	2.70
3	Nb521	11.8	5.33	5.88
4	Mo	9.9	6.10	6.58
5	Ta	6.0	9.97	10.60

# Thank you for your attention!

**Shanghai Truer Technology Co.,Ltd**

No. 299, Songqiu Road, Qingpu District, Shanghai, China 201703

Tel: +86-21-34320902

Mobile:+86-15250014048 / 15250232891 / 13611869448 / 17316565943

Email: luke.zhang@prep-system.com / [lucy.wen@prep-system.com](mailto:lucy.wen@prep-system.com) /[cassiel.ding@prep-system.com](mailto:cassiel.ding@prep-system.com) / joan.zhou@prep-system.com<https://www.prep-system.com>